


NutriSpin 6 Meal Pet Feeder User Manual

> 定时多餐喂食器 使用说明书

Model / 型号: PF006 Please read this manual carefully before using. Keep the manual in a safe place for future reference 使用产品前请仔细阅读本使用说明书,并妥善保管

01 / Meet your Smart Feeder

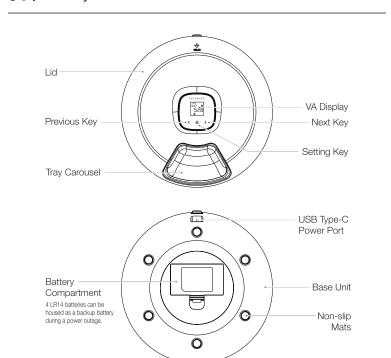

Inside the box



NutriSpin

6 Meal Pet Feeder





PETONEER

Manual


1 Power on the feeder Unbox and connect the USB Type-C Cable to the power socket at the bottom. The LCD will lit up!

02 / Operations



* The power supply is not included:

please prepare yourself!





③ Fill food Fill each compartment with food.

Align the lid with the base at the sprung

4 Lid closing

clip and press down!





schedule your feeding.


6 Connect feeder with your phone and



Note: Please hold down the '<' and '>' keys

Backup Battery Installation Use a screwdriver to open the battery compartment cover at the bottom. Put four LR14 batteries inside (note the positive and negative poles), replace the cover and tighten the screws.

Note: You need to buy the batteries separately, and only alkaline dry batteries are supported. Before installing, make sure that there is nothing in the food compartment. Install batteries for emergency backup in case of power failure. If the batteries are not used for a long time, please remove the battery.



03 / Quick Setup

Scan the QR code on the right and download the Petoneer App, which is available on App Store and Google Play. Click Sign up and Sign in to get walked through to connect the feeder by pressing the + icon.





04 / Manual Setting Explained



Unlock When locked, please hold down the "<" and ">" keys at the same time to unlock.



System Time Setting

When unlocked, double-click the " \equiv " key until the HOUR digits flash, press the " < " and " > " key to set the hour, short press the " \equiv " key when finished. When the MINUTE digits flash, press " < " and " >" keys to set the minute, press " < " and " >" keys to set the minute, press " < " and " >" keys to set the minute, press " < " and " >" keys to set the minute, press " < " and " >" keys to set the minute, press " < " and " >" keys to set the minute, press " < " and " >" keys to set the minute, press " < " < " and " >" keys to set the minute, press " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " < " <the " \equiv " key to save.



EN EN

Feeding Plan Setting

When unlocked, short-press the " \equiv " button until you see Number 1 flashes, short-press the " \equiv " button to see the HOUR digits of time flash. Set the first feeding as you set the system time. After that, press the " \equiv " key to save and press ">" to set Number 2. Set the five meals in the same way. If you only plan three meals a day, after you set the 3rd feeding, just press and hold to save and exit.

* It is recommended to set up a feeding plan in the mobile APP, which is simpler and more comfortable to operate.

05 / Keys & Bluetooth Status

Bluetooth	Flashing	Disconnected
	Steady On	Connected
Keys	C Previous Key	Short-press on the main menu; the tray will rotate clockwise by one compartment. Long-press to review the feeding plans!
		Short-press on the setting feeding plan interface to switch and set the feeding plan meal number, reducing hours and minutes.
		Short-press to review feeding plans, switch between feeding plans.
	Setting Key	Double-click on the panel to set the device's time, short-press to set feeding plans, and long-press for 5 seconds to restore the factory settings.
		Short-press on the feeding plan setting interface to switch between hours and minutes, long-press to return to the main interface.
	> Next Key	Short-press on the main menu; the tray will rotate counter-clockwise by one compartment. Long-press to review the feeding plans!
		Short press to switch between feeding plans, increase hours and minutes when setting time.
		Short press to review feeding plans, switch between feeding plans.

06 / Specification

at the same time to unlock

Model: PF006 Power Input: 5V==1A Communication: Bluetooth Capacity Per Compartment: 170ml(about 120g) Suitable Pets: Cats and Small Size Dogs

Guanlan, Longhua New District, Shenzhen 518110, China

Size: 320x320x83mm Net Weight: About 1134g Material: ABS Warranty: 1 Year

Manufacturer: SkyRC Technology Co., Ltd. Address: 4,5,8/F, Building No.4, Meitai Science Park, Guanguang South Road, Guihua,

07 / Precautions

1. If the feeder is powered off and then powered on, the time setting needs to be reset. Method 1: Connect the feeder with the App. After the connection is established, the feeder

will automatically synchronize the phone's time. Method 2: If the feeder is not connected to the app, you can set the time on the main interface. 2. Never place other sundries on the top of the feeder.

3. This feeder is for both dry and wet food.

- 4. The base of the feeder is strictly prohibited from being immersed in liquid. 5. If the feeder is not used for 5 minutes, it will automatically turn off the screen to save power.
- 6. Never fill food beyond the edge of the tray compartment to avoid malfunction. 7. When the feeder alerts on low battery, please replace the battery in time. If you are not going
- 8. Please get the power cable covered or well-organized to prevent pets from chewing. 9. This feeder is suitable for cats and Small Size Dogs.

08 / Warranty Terms


Within the period of warranty, if the product fails with no fault of user operations, it will be repaired at Petoneer's expense. The warranty will not cover product failure in examples below: 1). Intentional damage to the product by the user or third party.

2). Failure to operate or maintain the product following the (QIG) Quick Installation Guide

3). Failure by natural wear and tear including but not limited to scratching, corrosion, oxidation 4). Failure by non-authorized repair of the product including but not limited to user's own or

third-party repairing attempts or modifications.

01 / 产品概览

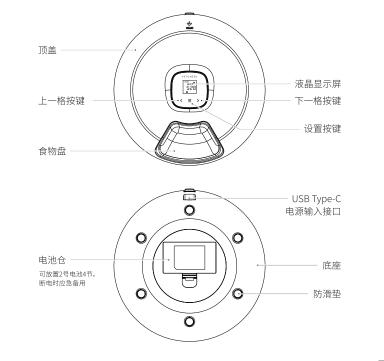


配件清单

EN EN

中文中文

中文 中文






转 USB-A电源线

说明书

02 / 使用操作

① 连接电源 取出主机,将电源线插入主机底部 接通电源,液晶显示屏背光亮起。

② 开盖 轻拨"OPEN"处卡扣打开顶盖。



* 本产品不提供电源适配器(USB 5V 1A), 请自行配置。



All Pictures shown in the manual are for illustration purpose only. Actual product may vary due to product enhancement.

④ 安装顶盖 对准卡扣后下压顶盖


⑤ 手动喂粮 短按"<"或者">"按键,即可立即出粮

③ 加粮

在食物盘里加入宠粮



提示:请同时长按住"<"和">"键解锁。



⑥ 添加设备,设置喂食计划









03 / 快速添加设备

安装备用电池

装回电池盖。

打开主机底部电池盖,将四节2号电池

(电压1.5V)装入电池仓(注意正负极),

提示: 备用干电池需自行购买, 仅支持碱性干电池。安装 电时紧急备用。备用电池如长期不用,请将电池取出。

扫描右侧二维码,按照提示下载安装 "Petoneer" APP,并注册登录账号, 点击"+"按照提示进行设置。

中文 中文





04 / 手动设置简介



锁定状态下,请同时长按住"<"和">"键解锁。



设备时间设置

解锁状态下双击"≡"键,设备时间的小时数字开始闪烁,按"<"">" 键设置小时,完成后短按"≡"键,分钟数字开始闪烁,按"<"">"键 设置分钟,完成后短按"≡"键。

解锁状态下短按"≡"键,图标"●"开始闪烁,再短按"≡"键,左侧 数字开始闪烁,以设置设备时间的方法进行第一餐喂食时间设置后, 短按"≡"键保存后,并按">"进入第二餐喂食时间设置,以此方法进 行五餐的喂食设置。如一天只喂食三餐,可以在第三餐完成设置后不

*建议手机app设置喂食计划,简单易操作。

05 / 蓝牙 & 按键

蓝牙	蓝牙图标闪烁	未连接状态
	蓝牙图标常亮	已连接状态
	く 上一格按键	主界面短按,转盘顺时针转动一格。 长按,进入查看喂食计划界面。
		设置喂食计划界面短按,切换设置喂食计划餐号,减少小时和分钟。
		查看喂食计划界面短按,切换查看喂食计划餐号。
	=	主界面双击,设置本机时间,短按进入设置喂食 计划界面,长按5秒恢复出厂设置。
按键	设置按键	设置喂食计划界面短按,切换小时和分钟, 长按返回主界面。
	> 下一格按键	主界面短按,转盘逆时针转动一格, 长按,进入查看喂食计划界面。
		设置喂食计划界面短按,切换设置喂食计划餐号、 增加小时和分钟。
		查看喂食计划界面短按,切换查看喂食计划餐号。

06 / 基本参数

产品型号: PF006 **输入电源:** DC 5V 1A **通 讯:** 蓝牙 单格容量: 170ml(约120g)

适用对象: 猫及小型犬

产品尺寸: 320x320x83mm 产品净重:约1134g 产品材质: ABS **执行标准:** Q/TK 002-2019 保修期:1年

07 / 注意事项

1. 喂食器断电再上电,需要重新设置时间。

方法一: 用手机app连接喂食器,连接成功后,喂食器会自动同步手机时间。

方法二:如果末连接app,可以在喂食器主界面设置时间。 2. 喂食器顶部禁止放置其他杂物。

3. 本产品干粮湿粮通用。 4. 喂食器机体严禁浸入液体中。

5. 喂食器5分钟未使用,将自动熄屏。 6. 请不要将宠粮填充超过食物盆边缘,以免引起设备故障。

7. 喂食器低电量报警时,请及时更换电池。如长期不用,请将电池取出。 8. 请做好电源线遮挡或收纳,以防宠物撕咬电线。

9. 本机适用于猫或小型犬。

08 / 保修条款

在保修期限内,对于正常使用Petoneer产品过程中,由于非人为导致的损坏,所产生的维修费用 和相关的人工费用,由Petoneer承担。以下情况导致的维修不在保修条款包含中。 (1)故意行为导致的损坏。

(2)未按照产品使用说明书指引使用、保养该产品。

(3)设备正常磨损、腐蚀、氧化、锈垢、耗损等原因导致的损失。 (4)因在非Petoneer授权维修代理店或用户自身进行维修、改造、清洗而造成的损坏。

服务热线: 400-808-5869 服务网址: www.petoneer.com

制造商: 天空创新科技(深圳)有限公司 制造地址:深圳市龙华区观澜街道桂花社区观光路美泰工业园4栋4,5,8层

中文中文

* 为了提供更好的产品,我们会定期进行产品改良。产品实物可能与说明书有差异。

www.petoneer.com

中文